


DATASHEET

**Semiconductor Optical Amplifier (SOA) Optical Spectral Engine G7:
14-Pin Butterfly Package, Center Wavelength: 1310nm, PM Fiber,
High Degree of Polarization, Spectral Coverage: 1270nm-1350nm,
FWHM: 80nm, Gain 35dB, Saturation 21dBm.**

Part# ASM006004

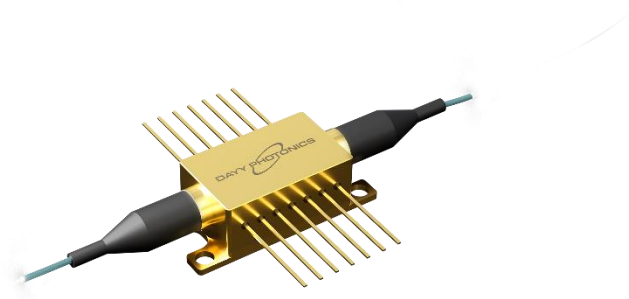

#DAY-OSE7-1310-PM-HP-1270_1350-80-35-21-2025_01_01

This document is the property of DAYY Photonics, and contains proprietary information. DAYY Photonics reserves the right to make product design or specification changes without notice.

DAYY Photonics Corporation 5150 Tacoma Dr., Houston, TX, USA 77041
sales@dayyphotonics.com, +1(346)263-3032, www.dayyphotonics.com

PRODUCT DESCRIPTION

The Semiconductor Optical Amplifier (SOA) at 1310nm is designed by using a high quality angled multi-quantum-well SOA chip in a 14-pin butterfly package with TEC/thermistor for closed-loop temperature control which can assure a stable amplified output for a large dynamic input signal.

The SOA device has high small signal gain, high saturation output power, high polarization extinction ratio, low noise figure and broad wavelength bandwidth. The product is Telcordia GR-468-CORE qualified and in compliance with RoHS and REACH Directives.

KEY FEATURES

- Center Wavelength 1310nm
- Small Signal Gain: >30dB
- Bandwidth FWHM: >70nm
- Max Optical power: >14dBm
- Light output: FC/APC Connector
- Integrated Thermoelectric cooler and thermistor

APPLICATIONS

- Optical Component Testing
- Telecom Test Equipment
- Medical Optical Coherence Tomography
- Industrial Optical Coherence Tomography
- Metrology
- Fiber Optic Gyroscopes
- Biomedical Imaging Systems
- Optical Sensing
- White Light Interferometry & Chromatic Dispersion
- Research and Development



#DAY-0SE7-1310-PM-HP-1270_1350-80-35-21-2025_01_01

This document is the property of DAYY Photonics, and contains proprietary information. DAYY Photonics reserves the right to make product design or specification changes without notice.

DAYY Photonics Corporation 5150 Tacoma Dr., Houston, TX, USA 77041
sales@dayyphotonics.com, +1(346)263-3032, www.dayyphotonics.com

A. Performance Specifications Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Condition	Min.	Typical	Max	Unit
Storage Temperature	T _S	-	-40	-	+85	°C
Operating Case Temperature	T _{case}	-	-10	-	+70	°C
SOA Forward Current	I _F	-	-	-	1200	mA
SOA Reverse Voltage	V _R	-	-	-	1.5	V
TEC Current	I _{TEC}	-	-1.8	-	+1.8	A
TEC Voltage	V _{TEC}	-	-3.4	-	+3.4	V

B. Optical Characteristics (SOA chip temperature at 25°C)

Parameter	Symbol	Condition	Min.	Typical	Max	Unit
Center Wavelength	λ _c	-	-	1310	-	nm
3dB Optical Bandwidth	Δλ _{3dB}	-	-	80	-	nm
Saturation Output Power (@-3dBm)	P _{sat}	CW	-	21	-	dBm
Small Signal Gain (@Pin=-20dBm)	G _{max}	-	30	35	-	dB
Polarization Extinction Ratio	PER	-	-	20	-	dB
Noise Figure	NF	-	-	6	8	dB
Gain Ripple (rms)	Gr	-	-	-	0.28	dB


C. Electrical Characteristics (SOA chip temperature at 25°C)

Parameter	symbol	Condition	Min.	Typical	Max	Unit
Operating Current	I _{op}	-	-	800	1200	mA
Laser Forward Voltage	V _F	P _O =P _{sat}	-	1.5	2	V
TEC Set Temperature	T _S	-		25		°C
TEC Current	I _{TEC}	T _L =25C, T _C =70C	-1.8	-	+1.8	A
TEC Voltage	V _{TEC}	T _L =25C, T _C =70C	-3.4	-	+3.4	V
Thermistor Current	I _{TC}	-	10	-	100	μA
Thermistor Resistance	R _{TH}	T _L =25C	9.5	10	10.5	KΩ
Thermistor Constant	B	-	3800	-	4100	k
Thermistor Temperature	-	-	-	-	100	°C

D. Input\Output Fiber

Parameters	Description
Fiber Type	PM1300-XP
Pigtail Type	900μm loose tube
Pigtail Length	1.0±0.1m
Connector Type	FC/APC (Narrow Key)

E. MECHANICAL DIAGRAM (mm)

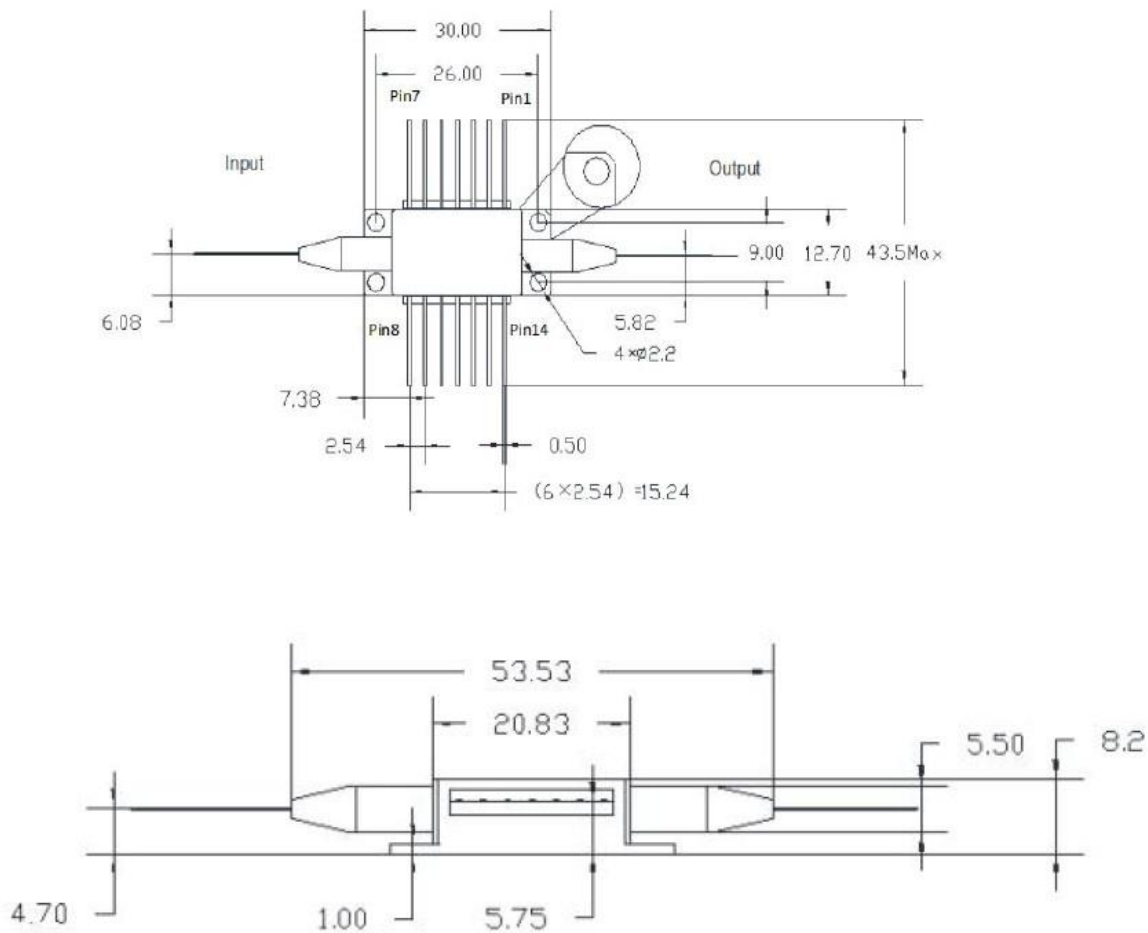


#DAY-0SE7-1310-PM-HP-1270_1350-80-35-21-2025_01_01

This document is the property of DAYY Photonics, and contains proprietary information. DAYY Photonics reserves the right to make product design or specification changes without notice.

DAYY Photonics Corporation 5150 Tacoma Dr., Houston, TX, USA 77041
sales@dayyphotonics.com, +1(346)263-3032, www.dayyphotonics.com

F. PIN OUT

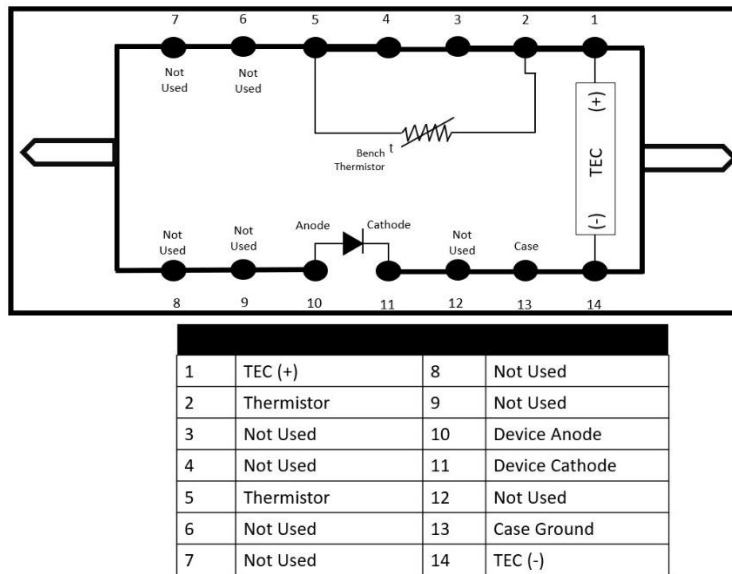

G. MOUNTING RECOMMENDATIONS:

The SOA can be mounted on a flat cooling surface without having to risk forming the pins. Mounting surface should be flat, with no physical obstructions underneath to cause any discontinuity in the surface flatness. If a heatsink is used, the base of the butterfly package will rest on the surface of a heatsink in order to cool the internal TEC.

Maximum torque to avoid damage to the device is 13 lb.in. /1.5 Nm. Minimum torque is 9 lb.in/1.1 nm. Do not use self-tapping screws. This light source should be mounted so that mechanical vibrations cannot cause short circuits between leads. AZIMUTH 7 pin, 0.100" pitch Sockets are recommended. The 14 pins will rest on a pair of spring-loaded sockets and be squeezed between the contacts and a plastic clamp.

H. SAFETY

All statements regarding safety of operation and technical data will only apply when the unit is operated correctly.

This OSA is a Class 1M laser product. It is safe for all conditions of use except when passed through magnifying optics such as microscopes and telescopes. It produces a beam that is divergent. If light is re-focused use protective eye wear.

#DAY-0SE7-1310-PM-HP-1270_1350-80-35-21-2025_01_01

This document is the property of DAYY Photonics, and contains proprietary information. DAYY Photonics reserves the right to make product design or specification changes without notice.

DAYY Photonics Corporation 5150 Tacoma Dr., Houston, TX, USA 77041
sales@dayyphotonics.com, +1(346)263-3032, www.dayyphotonics.com